


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

REVISIONS			
REV	DESCRIPTION	DATE	INITIAL
---	---	---	---

SKIM FACE FLUSH WITH
SOCKET POINTS.

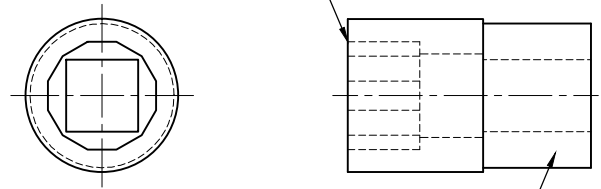

REMOVE MARKINGS AND
ENGRAVE TOOL No.

- NOTES
1. SOCKET USED ON LONG RANGER DRIVE SHAFT NUTS, AND JET RANGER PILLOW BLOCK BOLTS.

RB RED BARN MACHINE	
TITLE DRIVE SHAFT NUT & M/R PILLOW BLOCK BOLT SOCKET	
DWG NO. RBGTMD12	REV
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY: PERRITT
TOLERANCES ON: DECIMALS .XXX ± .005 .XX ± .01 .X ± .1	APPROVED <i>D Weil</i>
METRIC REF. .Xmm ± .1mm FRACTIONS ± 1/32 ANGLES ± 5°	HEAT TREAT FINISH BLACK OXIDE
UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING	USED ON MODEL BELL 206 SEE NOTES
SCALE NTS	DATE 10-21-10
SHEET 1 of 1	

ASSY QTY	ASSY #	B/O	PART #	UNIT QTY	DESCRIPTION	MATERIAL	B/O INFORMATION OR SPECIFICATIONS
			-1	1	3/8in., 12pt. SOCKET	STEEL, BLACK	SNAP-ON #GTMD12 (NEEDS MODIFIED)